DES PDM 24 CLEAN

Cable entry plate for Food&Pharma applications

- For large number cables without connectors
- Internal reinforcing frame
- Rounded edges
- UL94-HB self estinguishing
- **Fixing with snap mounting or screws**
- IP66

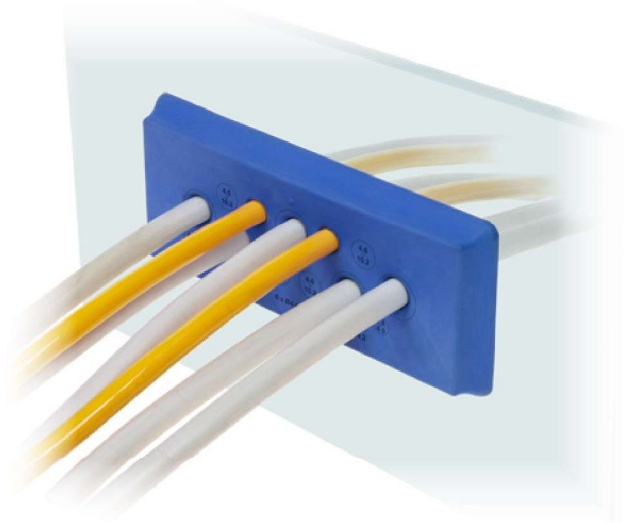

Snap mounting and M4 threaded inserts



Model	Code	Cable nr.	Ø Cable min/max [mm]	Dimensions [mm] Cut-out	Dimensions [mm] Plate	Pcs /pack
DES PDM 24/13 CLEAN	1732025017	2 - 6 - 5 -	2,8 / 6,5 4,6 / 10,2 8,6 / 16,2	112 x 36	155 x 66	1
NEW DES PDM 24/25 CLEAN	1732025025	12 - 7 - 6 -	2,8 / 6,5 4,4 / 9,7 6,8 / 12	112 x 36	155 x 66	1
NEW DES PDM 24/32 CLEAN	1732025032	Double parallel membrane 21 - 8 - 3 -	2,8 / 6,5 4,6 / 10,2 6,8 / 12	112 x 36	155 x 66	1

The DES PDM 24 CLEAN family is mainly used in the food&pharma production thanks to to the rounded shape without edges which avoids dirt accumulation and allows frequent washing.

The cable entry plate can be fixed to the panel from the inside with four hidden screws or with snap festening with four hooks.

The holes location is guided by a laser printing which guarantees the front clean area during the operation.

The first front membrane is lightly drilled with a small screwdriver, while the second parallel membrane acts as a reinforcement, ensuring a very high strain relief and water resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-HB

Temperature: -40°C… +110°C (static)

Features: halogens and silicones free

Related products

IFP plugs (page 85)

FVM - Metal detectable cable ties (page 96)

HY360 hydraulic punch driver (page 129)

PF/PFX cable entry system plates (from page 130)

Dimensions [mm]

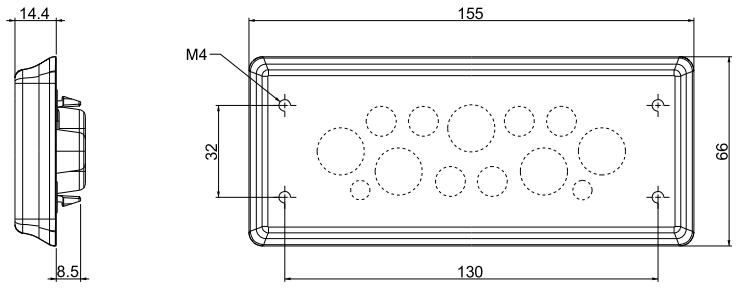

FDA COMPLIANT · up to IP66 · ECOLAB · UL94-HB · UV ISO 4892-2A · RoHS COMPLIANT

© Detas SpA - ISO9001/ ISO14001 certified company

Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120 - info@detasultra.com - **www.detasultra.com**

DETASULTRA

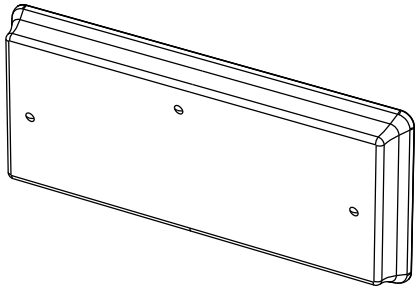

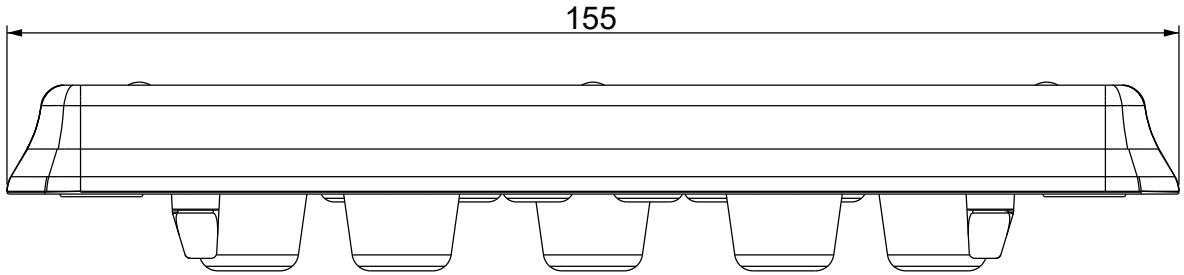

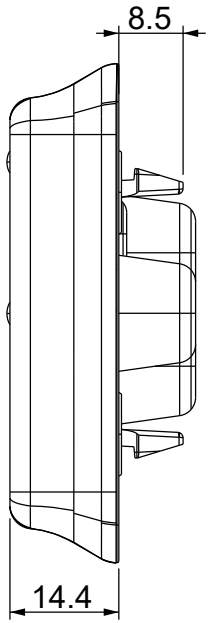

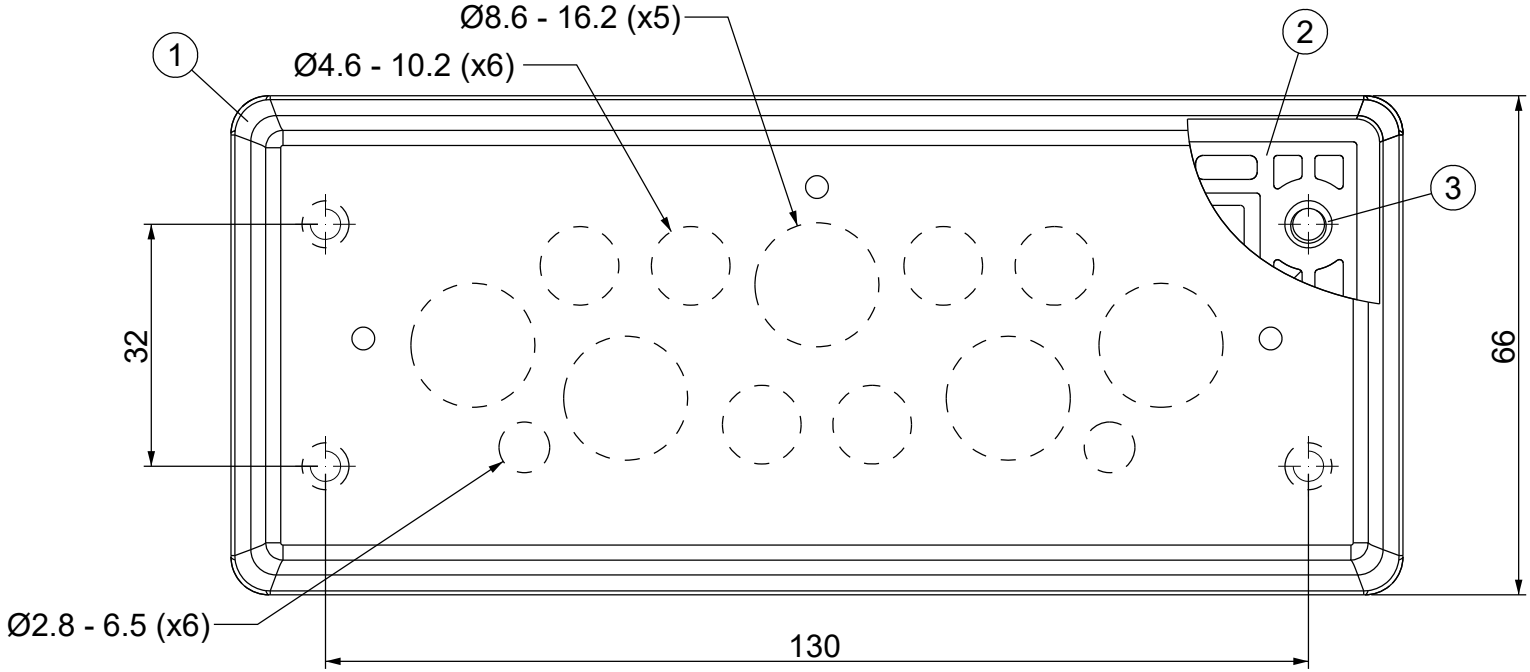

Id	Description	Material	Q.ty
1	Body	TPE	1
2	Internal frame	PA	1
3	M4 threaded insert	Brass	4

FDA COMPLIANT | IP66 | NEMA 4X | APPROVED LR MARINE TYPE | ECOLAB | UL94-V0 | UV ISO 4892-2A | RoHS COMPLIANT | TPE | +105 -40 °C

Recommended cut-out:
112 x 36 mm



Codice / Code	Descrizione / Description	Rev.
1732025017	DES PDM 24/13 CLEAN	002

Materiale / Material	Colore / Color	Peso / Weight (g)	Unità di misura / Measure units	Formato / Format	Scala / Scale
see table	Blue (RAL 5005)	-	mm	A4	1:1

UNI-ISO 2768-mK

Flammability: UL94-V0, self-extinguishing
Temperature: -40°C … +105°C
Properties: halogen-free, silicone-free

DETASULTRA
www.detasultra.com

QUESTO DISEGNO E LE SUE INFORMAZIONI SONO STRETTAMENTE RISERVATE DI PROPRIETA' DETAS SPA.
NON UTILIZZARE PER SCOPI DIVERSI DA QUELLI PER CUI SONO STATE FORNITE. DO NOT SCALE DRAWING.

Data / Date	Numero foglio / Sheet number	Numero progetto/ Project number
20/04/2021	-	-

Disegn. / Drawn	Note / Notes
ravezzano@detas.com	-