

# WA-R Automotive


## WRAP AROUND



Halogen Free



Internal usage diameter in mm (D)	Width open sleeving in mm (D)	Packaging in mt
5	35 ± 5	100
8	45 ± 5	100
10	55 ± 5	100
13	65 ± 7	50
16	75 ± 7	25
20	90 ± 7	25
25	115 ± 9	25
29	125 ± 9	25
32	145 ± 9	25
38	165 ± 9	25
45	195 ± 12	25

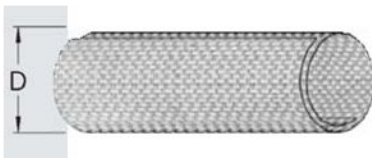

**BRAIDED POLYESTER  
SLEEVING OPEN-CLOSE  
WRAP AROUND EFFECT**

**“SERIES WA-R”  
AUTOMOTIVE**

### General features

The braided sleeving of the Series “WA-R” Wrap Around, produced from open fabric made of polyester fibre, is used for protecting electrical tubing and cabling in different sectors such as: Automotive, Automation and Electrical wirings. Thanks to its Wrap Around self-closing feature the “WA-R” series is the ideal product for assembling cabling at the completion of a process and as it is a sleeving designed for the automotive sector is very wear resistant.

## Technical features

• Operating temperature	-50 °C ÷ +150 °C	
• Resistance to heat	+175 °C	240h
• Resistance to abrasion	Min. 9000 cycles (D.19)	ACCORDING TO STANDARD ISO 6722
• Resistance to oils	Excellent	GMW 14327
• Self-extinguishing		ACCORDING TO STANDARD FMVSS 302
• Halogen Free		
• Flexibility	Excellent	
• Sleeving clamping	Excellent	
• Directive	2002/95/CE RoHS	
• Standard colors	Nero	
• Other diameters and colors	Upon request	
• Packaging	On reels	

COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV  
= ISO 9001 =