




## Shield clamps for 10 x 3 mm bar

- ▶ Suitable for a range of cables from 2 to 35 mm
- ▶ Installation on 3x10 busbar
- ▶ Snap-in assembly, no need to use tools
- ▶ Constant pressure of the spring on the cable sheath without having to run tests and checks

**NEW**

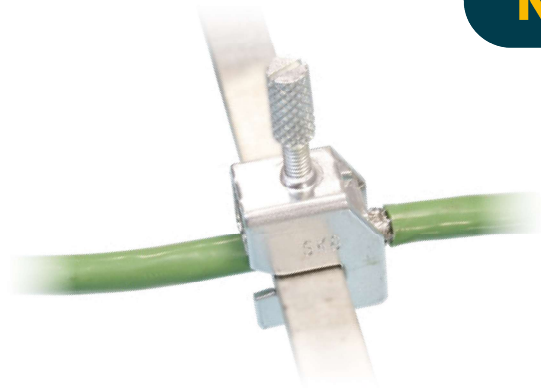

| Model     | Code       | Clamping range<br>[mm] | Dimensions [mm] |       |     |     |      | Pz<br>/pack |
|-----------|------------|------------------------|-----------------|-------|-----|-----|------|-------------|
|           |            |                        | A               | B     | C   | D   | E    |             |
| MSH 2-5   | 1734040405 | 2 - 5                  | 19,5            | 47,5  | 6,5 | 6,5 | 9,4  | 10          |
| MSH 3-8   | 1734040408 | 3 - 8                  | 19,5            | 49,5  | 6,5 | 9   | 12,4 |             |
| MSH 3-14  | 1734040414 | 3 - 14                 | 19,5            | 60,6  | 6,5 | 14  | 17,3 |             |
| MSH 3-20  | 1734040420 | 3 - 20                 | 19,5            | 75    | 6,5 | 21  | 24   |             |
| MSH 20-35 | 1734040435 | 20 - 35                | 20              | 106,5 | 6,5 | 36  | 40   |             |

The MSH shield clamps enable the cable shield to be grounded easily and effectively. The MSH shield clamps are used on 10x3 bars and they are secured tightening the M4 or M5 screw which is also making strain relief function.

### Technical data

**Material:** zinc plated steel

### Dimensions [mm]

